# Bona Premium Color Chips

**Achieve unique design elements when transforming resilient floors**

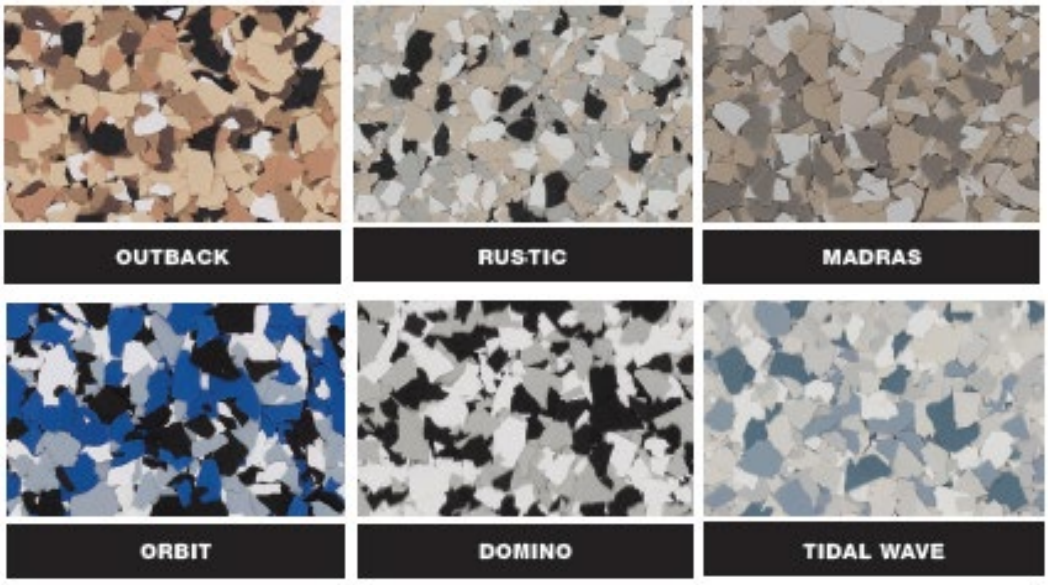


Providing limitless color combinations, add to base and color coats for a beautiful design element, while increasing durability and lifespan of Resilient floors. Choose from six color chip options and achieve a desired look based on the concentration.

- Adds a design element for beauty and depth
- Easy to apply at different concentrations
- Increases durability and lifespan of floor

# Bona Premium Color Chips

**Achieve unique design elements when transforming resilient floors**

## PHYSICAL CHARACTERISTICS

**Ingredients** – Barium sulfate, calcium carbonate, proprietary resins, titanium dioxide, pigment(s)
**Color** Orbit, Domino, Tidal Wave, Rustic, Outback, Madras
**Dry Film Thickness Gauge** - 5 mils
**Solids** – 100%
**Shape** – Random
**Size** – ¼"
**Gloss Level (60º)** – <15 units
**Odor** – Odorless
**Materialism** – Non-metameric
**Packaging** – 5lbs bag

## APPLICATION CHARACTERISTICS

**Application Tools** – Hand
**Coverage** – 50-200 square feet per pound*
**depending on desired coverage*

## RECOMMENDED USE

Use together with Bona Pure Color and/or Bona Pure HD on VCT, linoleum, PVC, LVT and rubber floors. At schools, healthcare facilities, retail spaces and commercial buildings.

**BEFORE USING, READ ALL DIRECTIONS AND SAFETY DATA SHEETS.**

FOR TECHNICAL ADVICE: Call Bona US at 800-872-5515

## NOTE

The Bona Premium Color Chips are to be used together with Bona Pure Color, Bona Pure Seal, and Bona Pure HD. Read all back-label content for each product before application.

## CHIP APPLICATION

The chips are to be added during the base color application process and must be added while the base color is wet. Work in small sections, approximately 3' x 3' and distribute chips by hand. Grab the desired amount of chips and gently disperse chips in an upward motion, allowing the chips to fall within the 3' x 3' area. Ensure there is a 12" to 18" wet base color line where chips are not dispersed. This wet line will allow overlapping of base color and chip coverage of the next floor section. Distribute desired amount of chips.
**NOTE**: If a second coat of base color is needed, chips are to be applied in the second coat of wet base color.

## STORAGE

Store in airtight poly bag in a dry environment at room temperature to avoid moisture, humidity, and product damage.

## ORDERING INFORMATION

| Item # | Description | Size | No. Case | Weight/ Lbs. |
|---|---|---|---|---|
| AX0003624 | Orbit | ¼" | 1 | 5 lbs. |
| AX0003625 | Domino | ¼" | 1 | 5 lbs. |
| AX0003626 | Tidal Wave | ¼" | 1 | 5 lbs. |
| AX0003726 | Rustic | ¼" | 1 | 5 lbs. |
| AX0003727 | Madras | ¼" | 1 | 5 lbs. |
| AX0003728 | Outback | ¼" | 1 | 5 lbs. |