


Bona SuperSport 2K

BONA SUPERSPORT SYSTEM – GREAT SURFACES FOR GREAT GAMES

bona.com/supersport2k

Bona®

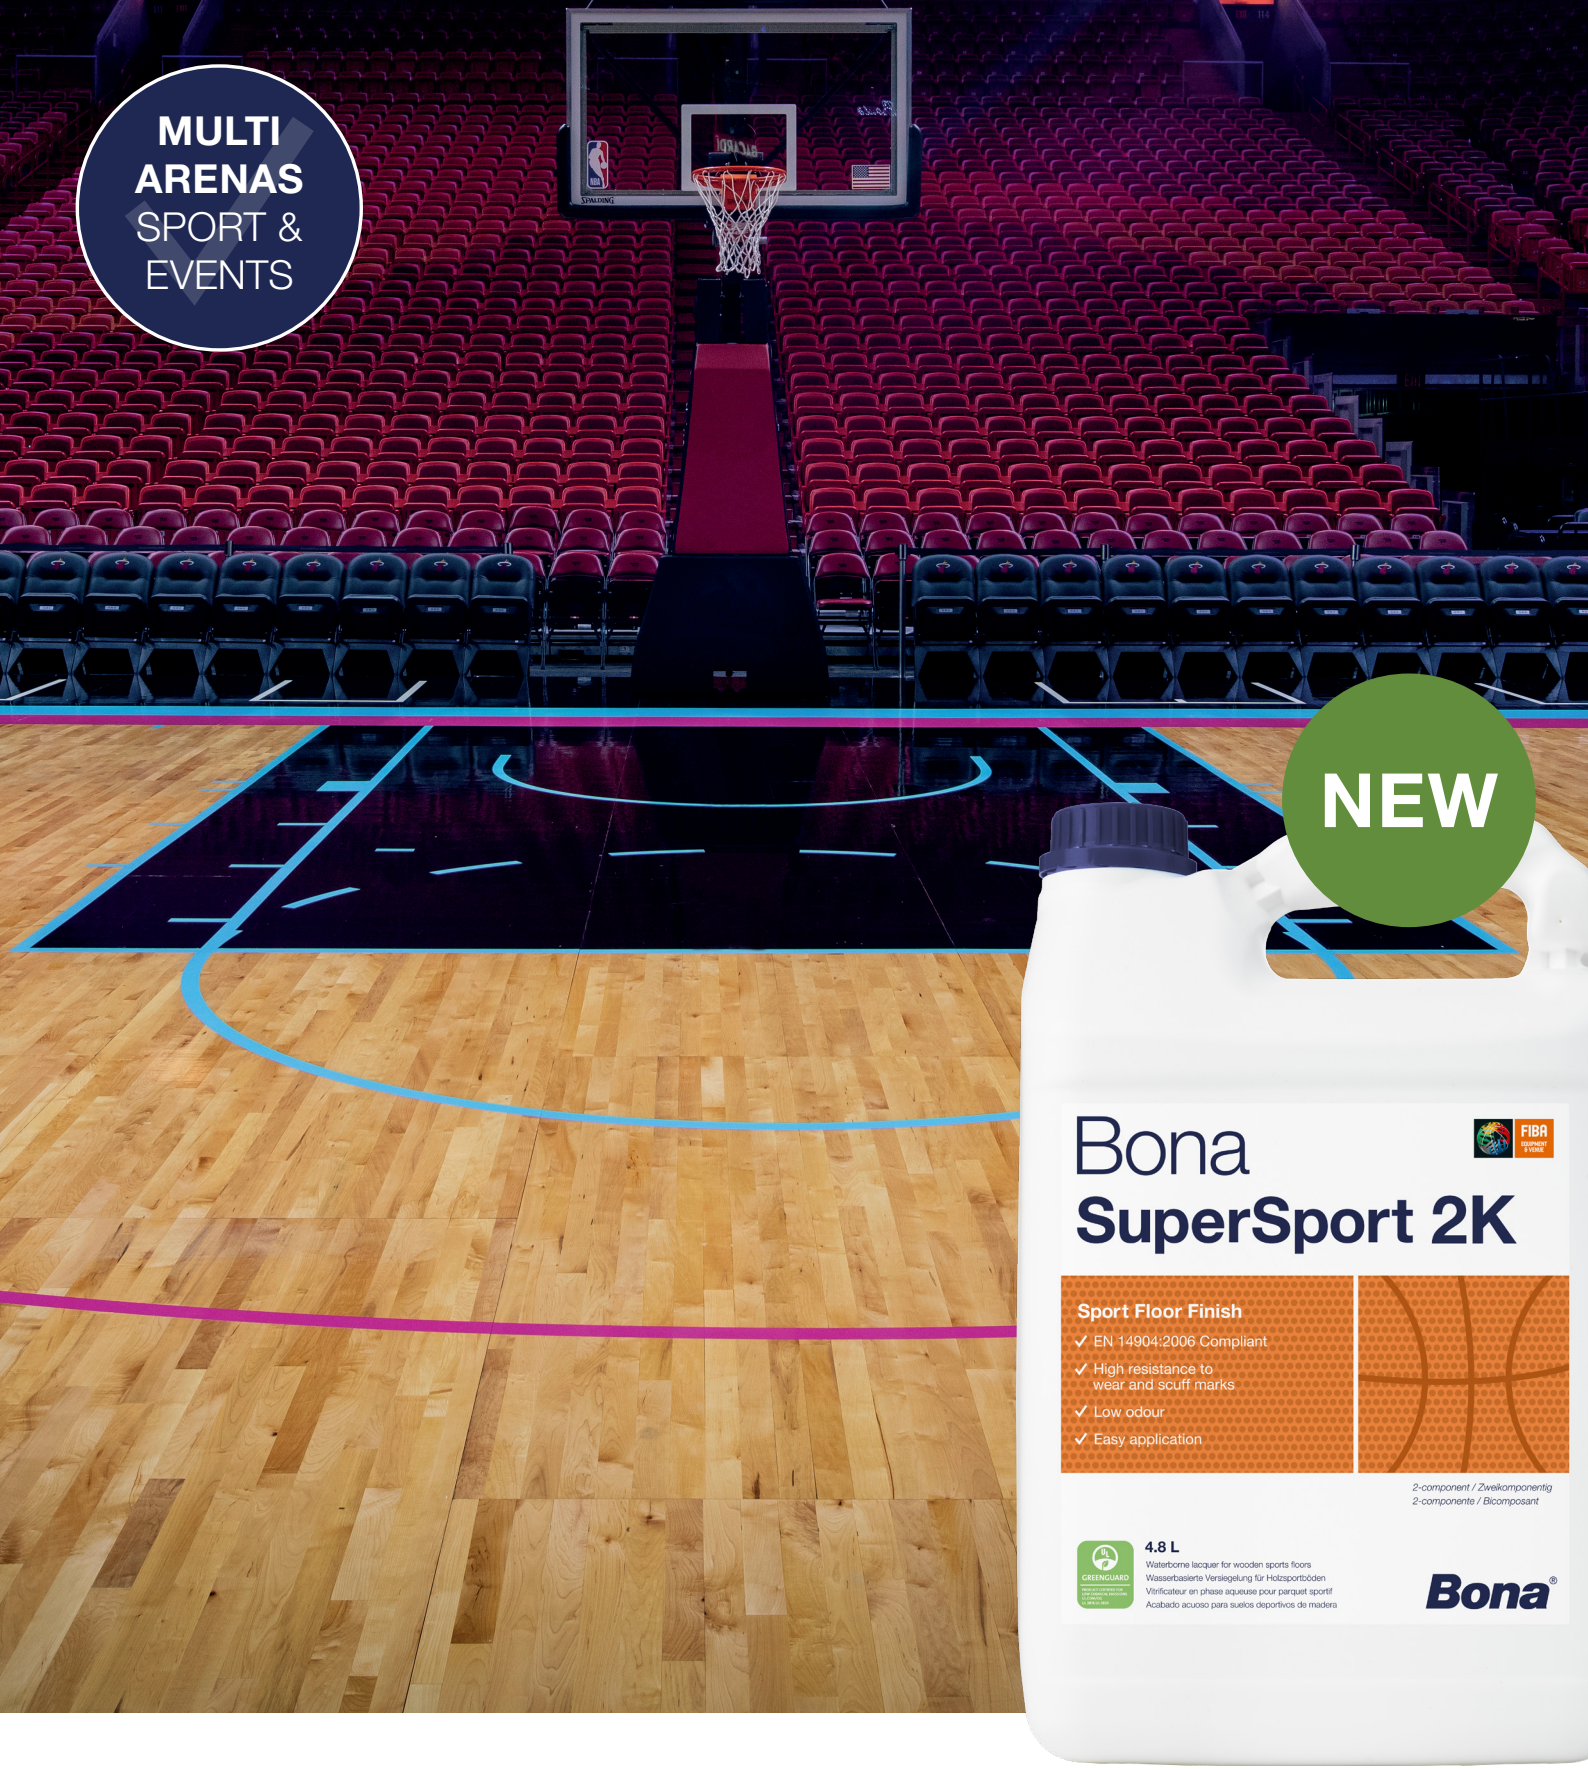

Bona SuperSport 2K

Great surfaces for great games

Bona SuperSport 2K is a two-component waterborne wood finish with high durability and appearance. Specifically formulated for professional use on indoor sport floors, providing a tough, durable, high-build polyurethane finish. Clear, non-yellowing formula.
Compliant with the European standard for indoor sports surfaces.

KEY BENEFITS

- High resistance to wear and scuff marks
- Low odour
- Easy application

TREATMENT SCHEDULE

Untreated wood:

1X Bona Primer
1X SuperSport 2K
Light sanding grit 150
1-2X Pure Colour (for zones, areas)
1X SuperSport Line Paint
1-2X SuperSport 2K

Previously treated wood surfaces:

Cleaning and abrasion with Diamond Abrasives
1-2x SuperSport 2K

TECHNICAL DATA

Type of lacquer:	2-component waterborne 100% polyurethane lacquer
Sheen (at 60°):	Matt ~20%, Gloss: ≈85
Dilution:	If required, dilute with Bona Retarder (4%) for longer open time.
Drying time:	- Ready for recoating: 3 hours* - Ready for sanding: 12 hours* - Ready for play: 3 days*
Application tools:	Bona Applicator Bar or Bona Roller
Application rate:	8-10 m^2/litre (120-100g/m^2) per coat
Safety:	Lacquer: Unclassified Hardener: Classified (see Safety Data Sheet)
Cleaning:	Wipe tools free from residual material before cleaning with a minimum of water. Dried material can be removed with acetone.
Shelf life:	1 year from date of production in unopened original container.
Storage/transport:	The temperature must not fall below +5°C or exceed +25°C during storage and transport.
Disposal:	Wastes and emptied containers should be handled in accordance with local regulations.
Pack sizes:	3 x 5 litres

**under normal climate conditions, 20°C/60% R.H.*